


# MODEL : BT-SUB-Mini



## Dimension

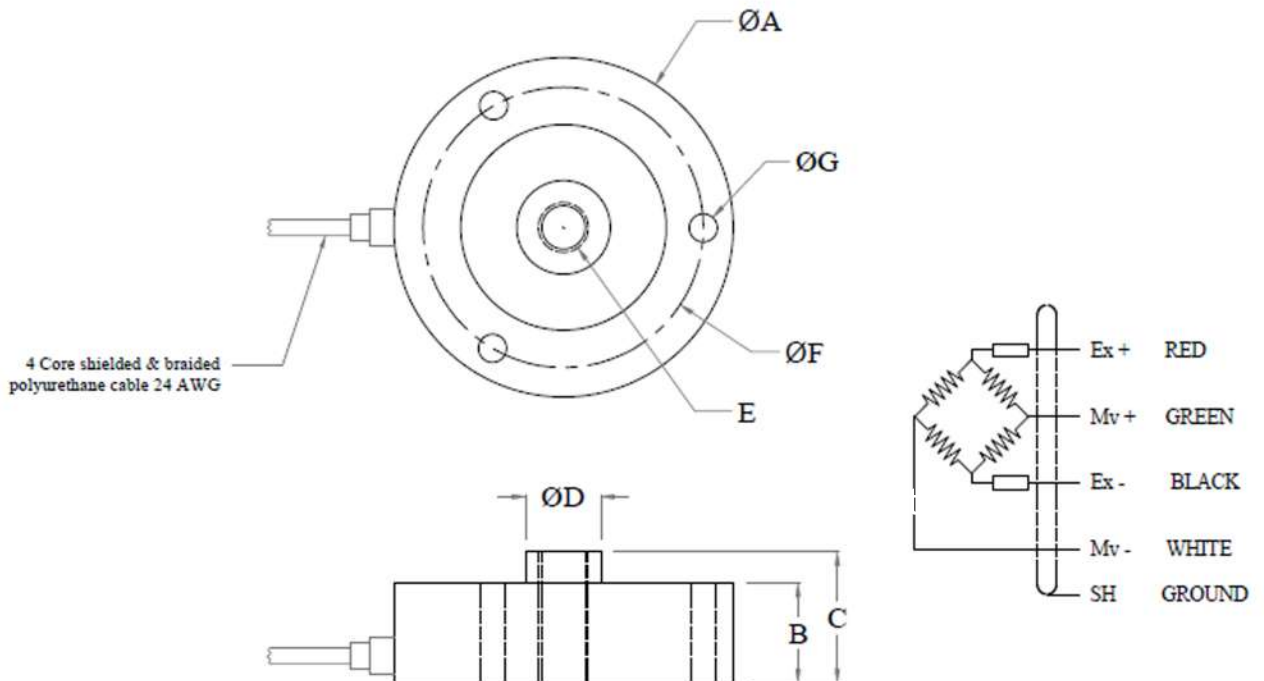

Cap. Kg.	A	B	C	D	E	F	G
50 - 250	28.8	15	18	6	M4x0.7	26	3.2

All Dimensions are in mm.

## MODEL : BT-SUB-Mini

### Performance Data

Capacity Range (in Kgf )	50 / 100 / 250
Nominal Sensitivity (mv/V)	1±0.25%
Zero Signal Tolerance	0 ± 2%
Input Resistance	350±5 Ω
Output Resistance	350±3 Ω
Recommended Excitation Voltage	12 VDC
Maximum Excitation Voltage	18 VDC
Linearity Deviation (as % of Full Scale)	< ± 0.025
Repeatability (as % of Full Scale)	< ± 0.025
Hysteresis (as % of Full Scale)	< ± 0.025
Creep (as % of Full Scale) in 30 min	< ± 0.020
Effect of Temperature on Zero ( % / °C)	± 0.002
Effect of Temperature on Span ( % / °C of Load)	± 0.001
Compensated Temperature Range	-10 to + 40°C
Operating Temperature Range	-20 to +70°C
Combined Error (as % Full Scale)	< ± 0.04 %
Insulation Resistance ( @ 50 VDC)	> 1000 M Ω
Max. Limit Force (as % of Full Scale)	150
Breaking Force (as % of Full Scale)	300
Lateral Load Limit (as % of Full Scale)	
Protection Class	IP 67
Material of Construction	Stainless Steel

### Features

- ★ Low Deflection & Creep
- ★ Allow High Permissible Dynamic Load
- ★ High Fatigue Rated & impact Resistant

### Application

- ★ SPM/Level Measurement/Testing Machine (for use in compression model only) Tank Weighing / Process Automation

*Disclaimer :Specification and Dimensions are subject to change without notice and do not constitute any liability whatsoever*

### Sensotech

2/675, " THE PALMS", 1st Cross Street, Ranga Reddy Garden, Neelankarai, Chennai-600 041

Tel : +91- 44 -2449 4305 / 91763 70667 / 73057 16667

Mail : sales@sensotechindia@gmail.com / sensotechindia@gmail.com

Website : www.sensomaticloadcell.net / www.sensomaticloadcell.com