

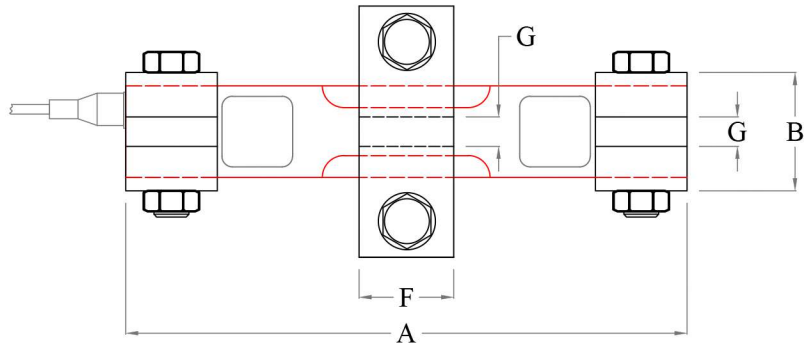


MODEL : DESB-RTM (Single Rope)

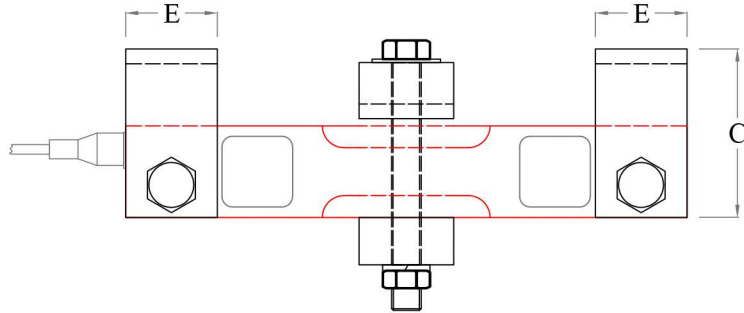

Dimension

MODEL - DESB RTM (Single Rope)

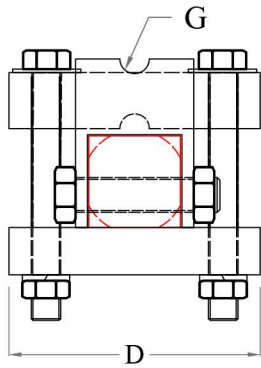

Cap. kgf	A	B	C	D	E	F	G
450 - 2250	190	40	57	85	32	32	R5

All Dimensions are in mm.

MODEL : DESB-RTM (Single Rope)

Performance Data

Capacity Range (in Kgf)	500 / 1100/ 1350 / 2250
Capacity Range (in tf)	4.5 / 5 /10 / 11.5 / 15 / 20
Nominal Sensitivity (mv/V)	3±0.25%
Zero Signal Tolerance	0 ± 2%
Input Resistance	700±5Ω
Output Resistance	700±3Ω
Recommended Excitation Voltage	10 VDC
Maximum Excitation Voltage	25 VDC
Linearity Deviation (as % of Full Scale)	< ± 0.020
Repeatability (as % of Full Scale)	< ± 0.020
Hysteresis (as % of Full Scale)	< ± 0.020
Creep (as % of Full Scale) in 30 min	< ± 0.020
Effect of Temperature on Zero (% / °C)	± 0.002
Effect of Temperature on Span (% / °C of Load)	± 0.001
Compensated Temperature Range	-10 to + 40°C
Operating Temperature Range	-20 to +70°C
Combined Error (as % Full Scale)	< ± 0.025 max
Insulation Resistance (@ 50 VDC)	> 1000 M Ω
Max. Limit Force (as % of Full Scale)	150
Breaking Force (as % of Full Scale)	300
Lateral Load Limit (as % of Full Scale)	500:1
Protection Class	IP 68
Material of Construction	High Nickel Alloy Steel

Features

- ★ Low Profile Design
- ★ Excellent Overload Capability
- ★ In-built Lightning Protection
- ★ Low Deflection & Creep
- ★ Allows High Permissible Dynamic Load
- ★ Insensitive to Eccentric Load

Optional

- ★ Explosion Proof Version suitable for Group I, IIA, IIB, IIC & meet Temperature Class T4 / Zone I

Application

- ★ For Rope tension Measurement in crane / Lift
- ★ Suitable for 1/2/3/4/5/6 Ropes

Disclaimer :Specification and Dimensions are subject to change without notice and do not constitute any liability **whatsoever**

Sensotech

2/675, " THE PALMS", 1st Cross Street, Ranga Reddy Garden, Neelankarai, Chennai-600 041.

Tel : +91- 44 -2449 4305 / 91763 70667 / 73057 16667

Mail : sales@sensotechindia@gmail.com / sensotechindia@gmail.com

Website : www.sensomaticloadcell.net / www.sensomaticloadcell.com